


## FUSIBLES ELECTRÓNICOS


### SERIE 02

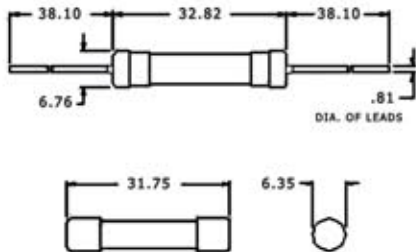

Características Eléctricas	
% Corriente	Tiempo de Apertura
110%	4horas Min
135%	1hora Max
200%	2s Max

CLAVE	AMP	Voltaje
02-0.5	0.5	250V
02-1	1	250V
02-2	2	250V
02-3	3	250V
02-4	4	250V
02-5	5	250V
02-6	6	250V
02-7	7	250V
02-8	8	250V
02-10	10	250V
02-12	12	250V
02-15	15	250V
02-20	20	250V


### SERIE 60

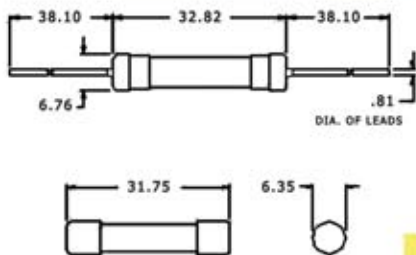

Características Eléctricas	
% Corriente	Tiempo de Apertura
110%	4horas Min
135%	1hora Max
200%	5s Max

CLAVE	AMP	Voltaje
60-0.5	0.5	250V
60-1	1	250V
60-2	2	250V
60-3	3	250V
60-4	4	250V
60-5	5	250V
60-6	6	250V
60-7	7	250V
60-8	8	250V
60-10	10	250V

### SERIE 14

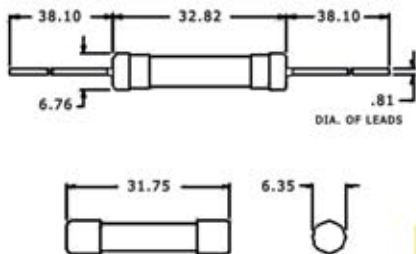

Características Eléctricas	
% Corriente	Tiempo de Apertura
110%	4horas Min
135%	1hora Max
200%	15s Max

CLAVE	AMP	Voltaje
14-1	1	250V
14-2	2	250V
14-3	3	250V
14-5	5	250V
14-8	8	250V
14-10	10	250V
14-15	15	250V
14-20	20	250V
14-30	30	250V