

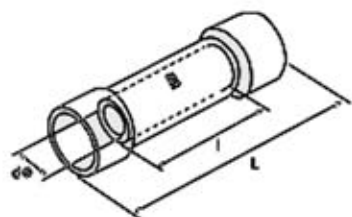


CONECTOR A TOPE AISLADO




CLAVE	Sección de Conductor		Dimensiones (mm)			Imax
	A.W.G	mm ²	I	dφ	L	
TCPR	22-16	0.5-1.5	15.0	1.7	26.0	19 ^a
TCPA	16-14	1.5-2.5	15.0	2.3	26.0	27 ^a
TCPAM	12-10	4-6	15.0	3.4	26.0	48 ^a

TERMINALES DE ESPADA AISLADAS

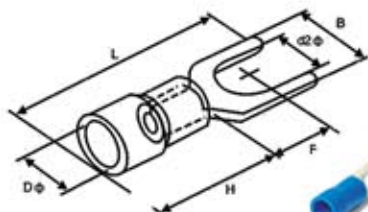

CLAVE	A.W.G	d2 φ (mm)	Dimensiones (mm)				
			B	L	F	H	Dφ
TER1/8	22-16	3.7	5.7	21.2	6.5	10.0	4.3
TER5/32		4.3	6.4	21.2	6.5		
TER3/16		5.3	8.1	21.2	6.5		
TEA1/8	16-14	3.7	5.7	21.2	6.5	10.0	4.9
TEA5/32		4.3	6.0	21.2	6.5		
TEA3/16		5.3	5.3	21.2	6.5		
TEA1/4		6.4	9.5	21.2	6.5		
TEAM5/32		4.3	8.3	26	7.5		
TEAM3/16	12-10	5.3	9.0	26	7.5	13.0	6.7
TEAM1/4		6.4	9.0	26	7.5		

TERMINALES DE OJO AISLADAS

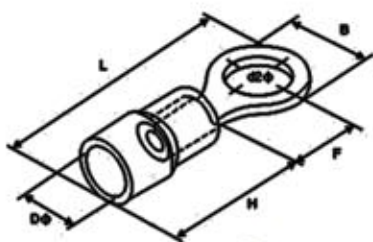

CLAVE	A.W.G	d2 φ (mm)	Dimensiones (mm)							
			B	L	F	H	Dφ			
TOR1/8	22-16	3.7	5.7	21.2	6.5	10.0	4.3			
TOR5/32		4.3	8.0	20.8	7.0					
TOR3/16		5.3	8.0	20.8	7.0					
TOR1/4		6.4	9.8	23	8.5					
TOR5/16		8.4	11.6	26.8	11.1					
TOA1/8	16-14	3.7	6.6	17.5	4.3	10.0	4.9			
TOA5/32		4.3	6.6	21.2	7.0					
TOA3/16		5.3	8.5	22	7.75					
TOA1/4		6.4	12.0	27	11.0					
TOA5/16		8.4	12.0	27	11.0					
TOA3/8		10.5	13.6	30.7	13.9					
TOA1/2		13.0	19.2	36.2	16.5					
TOAM1/8		12-10	3.7	7.2	21.7			5.3	13.0	6.7
TOAM5/32			4.3	7.2	21.7			5.3		
TOAM3/16			5.3	9.5	25.8			8.25		
TOAM1/4	6.4		12.0	29.35	10.7					
TOAM5/16	8.4		15.0	34	13.7					
TOAM3/8	10.5		15.0	34	13.7					
TOAM1/2	13.0	19.2	38.4	16						